

## Lexxi T1660 is the innovative, economical cable fault locator

Lexxi T1660 offers an unrivalled combination of performance, usability and economy. Combining hand-held ergonomics with a TDR engine, this fault locator gives technicians the tools they need to find faults quickly, with 1% distance accuracy and resolution.



- ▶ Large, color display
- ▶ 1% fault location accuracy
- ▶ 0.5m dead zone
- ▶ 6km, 19000' maximum range
- ▶ 7m, 23' minimum display range
- ▶ 11 range settings
- ▶ Operates from Alkaline or NiMH rechargeable batteries
- ▶ 12 hours typical battery lifetime (alkaline)
- ▶ User selectable Power Down time
- ▶ Selectable cable impedance
- ▶ VoP adjustable from 1% to 99%
- ▶ 100Ω Twisted Pair Alligator Clip cables included as standard




Large, easy to read color display simplifies fault locating in most conditions.



Modules for twisted pair, coaxial and power cables allow the Lexxi T1660 to find faults in wide ranging applications, even on live, 3-phase mains cables.



Lexxi T1660 is simple to use, with just 6 control buttons and an easy to follow menu to set your preferences.

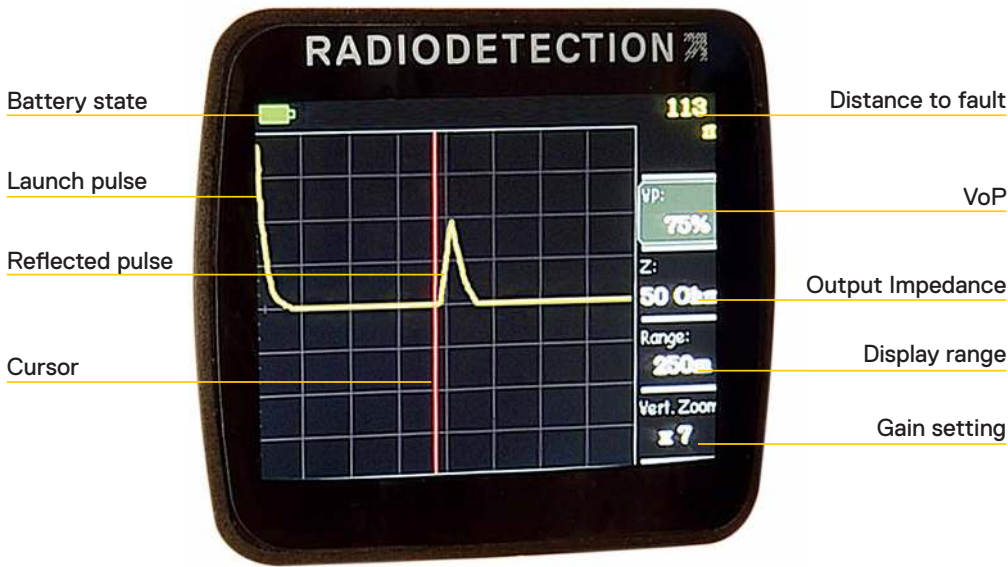

#### Standard Accessories

- Twisted Pair, Alligator Clips
- Lexxi T1660 bag, clear cover

#### Optional Accessories

- Mains Blocking Filter, 25Ω, Cat IV
- 50Ω Twisted Pair Plug-In, Croc Clip
- 100Ω Twisted Pair Plug-In, Croc Clip
- 75Ω BNC Plug-In, BNC-F adapter

Table of Specifications		Notes
<b>Ranges:</b>	7, 15, 30, 60, 120, 250, 500, 1000, 2000, 3000, 6000 20, 50, 100, 200, 400, 800, 1600, 3200, 9400, 10000, 20000	Meters Feet
<b>Range Selection:</b>	Manual range control	
<b>Accuracy:</b>	1% of selected range*	
<b>Display:</b>	328x256 pixel 3.5" color backlit LCD	
<b>Resolution:</b>	Approx 1% of range	
<b>Velocity Factor, VoP:</b>	Adjustable from 1% to 99%	
<b>Output Pulse:</b>	5V peak to peak	Into open circuit
<b>Output Impedance:</b>	Selectable 25, 50, 75 & 100 ohms	
<b>Output Pulse Width:</b>	3ns to 3ms	Automatic with range
<b>Scan Rate:</b>	2 scans/second	
<b>Batteries:</b>	Six AA (LR6/R6) Alkaline or NiMH cells	
<b>Battery Life:</b>	12 hours typical, continuous operation	Alkaline batteries
<b>Voltage Protection:</b>	600V AC Category III, 300V AC Category IV 250V AC	Lexxi T1660 with Mains Blocking Filter Lexxi T1660 with all other connectors and Plug-In Module options (see below)
<b>Power Down:</b>	Selectable 1, 3, 5, 10, 15 minutes or disabled	
<b>Operating Temp:</b>	-10. to 50.C, 14. to 122.F	
<b>Storage Temp:</b>	-20. to 70.C, -4. to 158.F	
<b>Dimensions:</b>	250x100x55mm, 9.8x4x2.2"	
<b>Weight:</b>	600g, 1.3lb	
<b>Standards:</b>	EMC BS/EN 61326-1	
<b>Water/Dust Proof:</b>	IP54	

\*Measurement accuracy of ±1% assumes accurate setting of Velocity of Propagation (VoP), homogeneity of VoP along the length of the cable and accurate cursor positioning.

Copyright © 2018 Radiodetection Ltd. All rights reserved. Radiodetection Ltd. is a subsidiary of SPX Corporation. Due to a policy of continued development, we reserve the right to alter or amend any published specification without notice. This document may not be copied, reproduced, transmitted, modified or used, in whole or in part, without the prior written consent of Radiodetection Ltd.

# SCHONSTEDT®

**Contact Us:**

800-999-8280  
 schonstedt.info@spx.com

**Find Your Local Dealer:**

schonstedt.com