


## The MPC-Kit: Magnetic + Pipe & Cable Locating

This kit includes a **GA-92XTd Magnetic Locator**, a dual frequency **Rex Lite Pipe & Cable Locator** and accessories. The Rex Lite is available in 82 kHz (used for tracing pipes) or 33 kHz (used for tracing cables), plus 512 Hz active frequency. The entire kit fits easily into a custom shoulder bag.

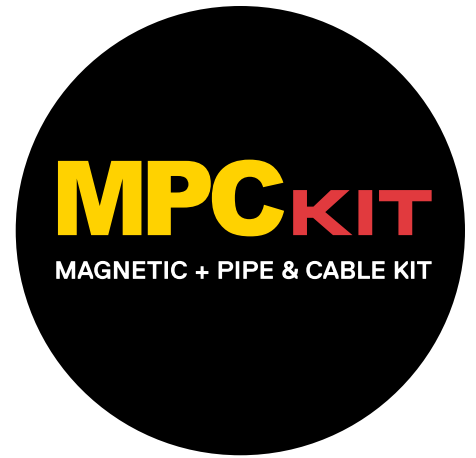

### Available in 2 models:

- ▶ **MPC-L82** includes Rex LITE Pipe & Cable Locator (512 Hz + 82 kHz) and a GA-92XTd Magnetic Locator
- ▶ **MPC-L33** includes Rex LITE Pipe & Cable Locator (512 Hz + 33 kHz) and a GA-92XTd Magnetic Locator




*"I work in the oil and gas industry in West Virginia and Ohio. I use Schonstedt products to locate private and public utilities on a daily basis. I would recommend them to anyone looking for professional quality equipment that is easy to learn."*  
—**Scott Hoffer Utility Coordinator, Antero Resources**

# GA-92XT<sub>d</sub>

MAGNETIC LOCATOR



Retracts for easier carrying

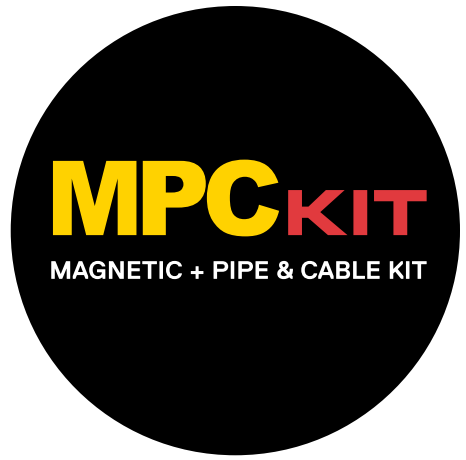

GA-92XTd Receiver Specifications	
Battery Indicator:	4-segment LCD
Gain:	4-Level LCD: Low (L), Medium (M), High (H), Extra High (XH)
Volume:	3 Levels: Muted, Medium and Maximum
Input Power:	One 9V Battery
Battery Life:	24 Hours (intermittent usage)
Operating Temperature:	-13° F to 140° F (-25° C to 60° C)
Overall Length:	Extended: 26" (66 cm), Retracted: 15.5" (39 cm)
Nominal Sensor Spacing:	9.5" (24 cm)
Weight:	2.4 lbs (1.1 Kg)
Water and Dust Resistance:	Rated IP54

### MPC-L33 Optimized for:

- Cable
- Electric
- Telecom

### MPC-L82 Optimized for:

- Water
- Sewer
- Gas Pipelines

# RexLITE

PIPE & CABLE LOCATOR



Extends for greater sensitivity



Rex LITE Receiver Specifications	
Operating Frequency:	Active: 512 Hz, plus 33 kHz or 82 kHz Passive: 50 or 60 Hz Sonde: 512 Hz
Battery:	One 9V Battery
Battery Life:	12 Hours (intermittent use)
Operating Temperature:	-4°F to 140°F (-20°C to 70°C)
Max Depth Capability:	Approximately 19' (5.8 m) Sonde mode - approximately 5' - 15' (1.5 m to 4.2 m)
Dimensions:	Extended: 27.7" (70 cm) Retracted: 17.5" (44 cm)
Weight:	2.8 lbs (1.3 kg)
Water and Dust Resistance:	Rated IP54

Rex LITE Transmitter Specifications	
Operating Frequency:	512 Hz, plus 33 kHz or 82 kHz
Battery:	Ten AA Batteries
Battery Life:	8 Hours (intermittent use)
Operating Temperature:	-4°F to 140°F (-20°C to 70°C)
Dimensions:	10" W x 10.25" D x 1.75" H (25.4 cm x 26 cm x 4.5 cm)
Output Power:	33 kHz and 512 Hz - 1 W Max 82 kHz and 512 Hz - 1/2 or 1 W Max
Outputs/Inputs:	¼" Phone Jack Output: -Inductive clamp -Conductive clips
Weight:	3.44 lbs (1.56 kg)
Water and Dust Resistance:	Rated IP54

Copyright © 2019 Schonstedt Instrument Company. All rights reserved. Schonstedt is a subsidiary of SPX Corporation. Due to a policy of continued development, we reserve the right to alter or amend any published specification without notice. This document may not be copied, reproduced, transmitted, modified or used, in whole or in part, without the prior written consent of Schonstedt Instrument Company.

# SCHONSTEDT

### Contact Us:

800-999-8280  
schonstedt.info@spx.com

### Find Your Local Dealer:

schonstedt.com